

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	2511-091	Total Pages	49
First Named Inventor or Application Identifier			
Dietmar Przytulla			
Express Mail Label No.	N/A		

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

- ☒ Fee Transmittal Form
Submit an original, and a duplicate for fee processing (2 pages)
- ☒ Specification (Total Pages 32)
(preferred arrangement set forth below)
-Descriptive title of the Invention
-Cross Reference to Related Applications
-Statement Regarding Fed sponsored R&D
-Reference to Microfiche Appendix
-Background of the Invention
-Brief Summary of the Invention
-Brief Description of the Drawings (if filed)
-Detailed Description of the Invention (including drawings, if filed)
-Claim(s)
-Abstract of the Disclosure
- ☒ Drawing(s) (35 USC 113) (Total Sheets 10)
- ☒ Oath or Declaration (Total Sheets 2)
☒ Newly executed (original or copy)
☒ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
☐ DELETION OF INVENTORS(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33 (b).
- ☒ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
- If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:
☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No:09/363,017 filed July 29, 1999 which is a continuation of U.S. application serial no. 08/793,751 filed September 12, 1995 as the National Phase of PCT/EP95/03586, now U.S. patent 5,964,367, which is a continuation-in-part of U.S. application serial no. 08/283,695 filed August 1, 1994, now U.S. patent 5,593,060 which is a continuation of U.S. application serial no. 08/049,722 filed April 20, 1993, now abandoned.

- ☐ Microfiche Computer Program (Appendix)
- ☐ Nucleotide and/or Amino Acid Sequence Submissions (if applicable, all necessary)
☐ Computer Readable Copy
☐ Paper Copy (identical to computer copy)
☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

- ☐ Assignment Papers (cover sheet & document(s))
- ☐ 37 CFR 3.73(b) Statement of Power of Attorney (when there is an assignee)
- ☐ English Translation Document (if applicable)
- ☒ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
- ☐ Small Entity Statement filed in prior application, Status still proper and desired
- ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
- ☒ Other:
Preliminary Remarks

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

20582

(Insert Customer No. or Attach bar code label here)

☐ Correspondence address below

NAME			
ADDRESS			
CITY	STATE	ZIP CODE	
COUNTRY	TELEPHONE	FAX	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Prior application: Examiner S. Catellano (anticipated)

Art Unit 3727 (anticipated)

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

This is a request for filing a ☒ continuation ☐ divisional application under 37 CFR § 1.53(b), of pending prior application no. 09/363,017 filed on July 29, 1999, which is a continuation of 08/793,751 filed September 12, 1995 as the National Phase of PCT/EP95/03586, now U.S. Patent 5,964,367, which is a continuation-in-part of U.S. application serial no. 08/283,695 filed August 1, 1994, now U.S. Patent 5,593,060, which is a continuation application of U.S. application serial no. 08/049,722, filed April 20, 1993, now abandoned

of Dietmar Przytulla
(inventor(s) currently of record in prior application)

for LIDDED BARREL
(title of invention)

1. ☒ The filing fee is calculated below:

PATENT APPLICATION FEE VALUE

TYPE	NO. FILED	LESS	EXTRA	EXTRA RATE	FEE
Total Claims	14	-20	0	\$18.00 each	\$ 0.00
Independent	6	-3	3	\$78.00 each	\$ 234.00
Basic Fee					\$ 690.00
Multiple Dependency Fee If Applicable (\$260.00)					\$ 0.00
Total					\$ 924.00
50% Reduction for Independent Inventor, Nonprofit Organization or Small Business Concern					- \$ 0.00
Total Filing Fee					\$ 924.00


2. ☒ Please charge the required fee to Pennie & Edmonds LLP Deposit Account No. 16-1150. A copy of this sheet is enclosed.
3. ☐ Amend the specification by inserting before the first line the following sentence:
This is a continuation, division, of application no. , filed .

- 4a. ☐ Transfer the drawings from the prior application to this application and abandon the prior application as of the filing date accorded this application. A duplicate copy of this sheet is enclosed for filing in the prior application file.
- 4b. ☒ New formal drawings are enclosed.
- 4c. ☐ Informal drawings are enclosed.
- 5a. ☒ Priority of application no. G 94 17 442.3 filed on November 3, 1994; application no. G 94 14 955.0 filed September 15, 1994; and application no. G 42 36 338.1 filed October 28, 1992, all of which have been filed in Germany, is claimed under 35 U.S.C. § 119.
- 5b. ☒ The certified copies of G 94 17 442.3 and G 94 14 955.0 have been filed in prior application no. 08/793,751, now U.S. Patent 5,964,367, and the certified copy of application no. G 42 36 338.1 has been filed in prior application no. 08/049,722, filed April 20, 1993.
- 6. ☒ Priority of pending prior application no. 09/363,017 filed July 29, 1999, application no. 08/793,751 filed on June 11, 1997, now U.S. Patent 5,964,367, application serial no. 08/283,695 filed August 1, 1994, now U.S. Patent 5,593,060, and application no. 08/049,722, filed April 20, 1993, now abandoned, is claimed under 35 U.S.C. § 120.
- 7. ☒ The prior application serial no. 08/793,751 is assigned of record to Mauser-Werke GmbH on June 11, 1997 at reel 8675, frame 0381.
- 8. ☒ The Power of Attorney appears in the original papers in the prior application no. 09/363,017, filed July 29, 1999.
- 10. ☒ Additional enclosures or instructions.

Information Disclosure Statement
Preliminary Remarks

Respectfully submitted,

Date March 14, 2000


Harry C. Jones III 20,280
PENNIE & EDMONDS LLP (Reg. No.)
1667 K Street, N.W.
Washington, D.C. 20006
(202) 496-4400

09525002 031400 004150 20052540

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application of: Dietmar Przytulla

Application No.: to be assigned

Group Art Unit: 3727 (anticipated)

Filed: Herewith

Examiner: S. Castellano (anticipated)

For: LIDDED BARREL

Attorney Docket No.: 2511-091

PRELIMINARY REMARKS

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

For the Examiner's assistance in examining the claims of this continuation application, a summary of these claims, as to their correlation with claims of applicant's prior applications and a third party patent, is set out below.

Claims 1 and 2 correspond to claims 9 and 18, respectively, of applicant's parent application 08/793,751, now U.S. patent number 5,964,367. Claim 1 differs from claim 9 of the '367 patent in that it recites in subparagraph c) that the outer ring flange has a portion facing rather than engaging against the inner side wall surface of the open upper end of the barrel body. Claim 2 differs from claim 18 of the '367 patent in that in subparagraph b), the portion extending downwardly and away from the barrel edge surface to provide a space sufficient to receive a lower claw of a parrot beak is not specifically defined as being conical.

Claims 3 and 4 correspond, respectively, to claims 23 and 28 of applicant's pending allowed application serial no. 09/363,017 filed July 29, 1999. Claims 3 and 4 differ from claims 23 and 28 of the '017 application in defining the first and second portions of the barrel edge and the lower surface of the exterior rib.


Finally, claims 5-14 are patterned after the claims in U.S. patent 5,881,898 granted March 16, 1999. In particular, independent claim 5 corresponds to independent claim 1 of the '898 patent with certain limitations being removed. Dependent claims 6, 7, 8 and 9 are each dependent on claim 5 of the present application and correspond, respectively, to dependent claims 2, 3, 6 and 7 of the '898 patent. Finally, claim 10 of the present application is identical (except for lettering and numbering of the subparagraphs) to claim 1 of the '898 patent. Similarly, except for the dependency of the claims, claims 11, 12, 13 and 14 of the present application correspond to claims 2, 3, 6 and 7 of the '898 patent.

With respect to the '898 patent, it shows that it has been assigned to Sonoco Products Company (Sonoco) and was filed January 11, 1996. The present continuation application is based on German priority applications 94 17 442.3 filed November 3, 1994 and 94 14 955.0 filed September 15, 1994. Accordingly, it is submitted that applicant is entitled to claims 5-14 as contained in the present application.

Further, with respect to the Sonoco '898 patent, applicant initially made the Examiner aware of Sonoco's corresponding and subsequently filed EPO application, EPO 784 020 A1. At that time, applicant was aware only of the claims of the published EPO application and copied claims corresponding to that application in the parent application 08/793,751. These claims have been allowed. It is submitted that in addition, applicant is entitled to claims 5-14 of the present application based on an earlier priority filing date.

Respectfully submitted,

Date March 14, 2000



Harry C. Jones, III 20,280
(Reg. No.)

PENNIE & EDMONDS LLP
1667 K Street, N.W.
Washington, DC 20006
(202) 496-4400

Lidded Barrel

RELATED APPLICATIONS

5 This is a continuation application of U.S. application serial no. 09/363,017
filed July 29, 1999, which is a continuation of 08/793,751 filed September 12, 1995 as the
National Phase of PCT/EP95/03586, now U.S. Patent 5,964,367, which is a continuation-in-
part of U.S. application serial no. 08/283,695 filed August 1, 1994, now U.S. Patent
5,593,060, which is a continuation application of U.S. application serial no. 08/049,722, filed
April 20, 1993, now abandoned.

BACKGROUND OF THE INVENTION

 This invention relates to a cylindrical, blow-molded lidded barrel (wide-
mouthed drum) with a barrel lid and tension-ring closure, in which in the closed position, the
tension ring, which is U-shaped in cross section, engages with its upper leg over the outside
upper edge of the lid and engages with its lower leg under an outside edge of the barrel that
runs basically horizontally or slightly obliquely downward in the opening area of the body of
the barrel.

20 Such a lidded barrel is known from, e.g., DE-B-41 08 606. In the case of this
barrel, however, the tension-ring closure is arranged some distance below the upper edge of
the lid or the opening of the barrel, so that handling such a filled, e.g., 220-liter lidded barrel
with a shipping weight of about 230 kg is possible only using special barrel-gripping tools.

This type of a lidded barrel was developed by Mauser in 1975 and distributed worldwide under the designation "standard lidded barrel"; it is well-suited for handling solid, particulate or pasty contents, but such a barrel is not readily suited for use with liquids.

5 In the case of lidded barrels, the sealing action of the barrel lid on the barrel mouth is produced by bringing about axial prestressing on the lid seal via the tension ring leg bevels at the upper edge of the lid and at the outer border of the barrel body (or indentation) as the tension ring is clamped or closed.

On lidded barrels that are approved for use in, e.g., the chemical industry, certain requirements with respect to their storage and transport safety are set; compliance with these requirements is tested and examined in special acceptance tests (e.g., dropping on its side, jacket dropping, diagonal dropping on the edge of the lid, static internal pressure test, i.a.). In the case of known existing plastic lidded barrels, even when barrels are dropped from heights of about 1.20 m -- e.g., from the bed of a truck -- leaks occur, especially in the case of liquids, or complete detachment of the barrel lid can even occur.

The drawbacks of previously known lidded barrels consist of, especially,

20 a) when there is axial internal pressure on the barrel lid (surge pressure when a barrel filled with water is dropped on its jacket or when there is hydraulic internal pressure in a closed barrel),

b) when a closed barrel that is filled with water slams flat against a side wall (jacket dropping), and

c) when a closed barrel that is filled with water drops diagonally onto the edge of the lid, various reactions occur:

the barrel lid is pressed axially outward,

the tension ring is pulled axially outward,

the tension ring (together with lid and barrel mouth area) is flattened at the central impact point,

the tension ring is heavily buckled laterally at the impact point and its U-shape is flared at both buckling points,

the lid edge tries to slide out from under the upper tension ring leg, prestressing on the seal is reduced and the locking system begins leaking.

The stresses that occur with the deformations must be absorbed in each case by the U-shaped tension ring. In this connection, the legs are pressed outward (flared) in the buckling areas. If the stress on the legs is too high, it leads to permanent deformations, prestressing on the seal is reduced at those points, and significant flaring results in leaks or leaking of the barrel.

An attempt is thus to be made to reduce the deformation of the tension ring, especially the flaring in the U-area, by structural measures, especially in the barrel mouth area, at the barrel lid and/or tension ring, while at the same time continuing to ensure good handling, i.e., easy closing of the tension ring.

5

SUMMARY OF THE INVENTION

The object of this invention is to indicate a lidded barrel made of plastic with a barrel lid and tension-ring closure which, owing to the special way in which the individual components are matched to one another, makes it possible to use the same barrel-gripping tool (parrot's beak) or which, in the filled state, can be manipulated with the same barrel-gripping tool, as usually used universally for modern plastic L-ring bung barrels or normal steel-bung barrels. In this case, the lidded barrel is to be especially suitable for using liquids, i.e., it remains liquidtight even when it falls or is dropped from considerable heights.

09526002-031400
15

This object is achieved according to the invention in that

directly behind the outer lid edge, which is overlapped by the upper leg of the tension-ring closure and which is shaped in cross section like a downward-facing U, in which the lid seal is inserted or foamed-in, the barrel lid has an essentially V- shaped engaging groove which has a flat groove floor and which is drawn in peripherally downward into the barrel body, between a reduced-diameter central lid disk and the lid edge,

20

the inside boundary of the engaging groove is formed by a ring part which slopes conically upward and to which is connected the flat lid disk with at least one bunghole that is recessed laterally in a bung housing,

the lower leg of the tension-spring closure engages tightly below (about 15 mm) the upper barrel edge in an indentation in the upper barrel wall, whose upper boundary represents the essentially horizontal barrel edge or slightly oblique attachment surface for the tension ring and whose outline, as it moves downward toward the transition to the fully cylindrical part of the barrel wall, is essentially designed to be increasingly flat-conical, and

the transition from the conical area to the fully cylindrical part of the barrel body is arranged at a distance of 80 mm to 140 mm, preferably about 120 mm, from the upper front edge of the barrel mouth edge, and

the upper barrel edge of the barrel mouth is designed solidly as an outer support for a lid seal and has a width (thickness) of approximately double the wall thickness of the barrel body.

This special design of the upper outer area of the lidded barrel according to the invention makes it possible, on the one hand, to use or apply barrel-gripping tools that are generally employed for bung barrels; on the other hand, the lidded barrel according to the invention also has considerably improved liquid sealing properties in the case where it is filled with liquid, e.g., in the case where barrels are dropped from considerable heights (about 1.8 m) or in the case of the previously described acceptance tests.

035626002 9314000
10
15

In a variant embodiment of the invention, it is provided that the conical outline of the barrel wall inside the indentation below the horizontal attachment surface for the lower leg of the tension-ring closure be made at an acute angle of between 15° and 30°, preferably about 18° to 20°, at the transition in the fully cylindrical part of the barrel body to the longitudinal axis of the barrel. As a result, the barrel-gripping device can, as usual, be brought in first against the cylindrical barrel body in the usual way and then raised upward, passing into the indentation until the lower barrel-gripping claw strikes the lower leg of the tension ring which rests on the horizontal attachment surface of the edge of the barrel and the upper barrel-gripping claw automatically pivots inward and tilts owing to the resistance that is produced, and the lidded barrel is tightly grasped and can be transported.

20

To ensure a secure fit of the lower tension-ring leg as well as the barrel-gripping claw that is applied thereto, it is provided according to the invention that the radial depth of the indentation, measured by the extension line of the fully cylindrical part of the barrel body, be between 12 mm and 25 mm, preferably about 17 mm. In this case, the slightly oblique barrel edge, which is used as attachment surface for the lower leg of the tension ring and which simultaneously represents the upper boundary of the indentation, is made at a distance of about 10 to 20 mm, preferably about 15 mm, from the upper barrel edge in the outside wall of the barrel body. A solid outer support for the tension ring and for the barrel-gripping device that is put on is further achieved in that the solid barrel mouth edge, with its upward-pointing smooth area that has the shape of a partial circle and is used as a sealing surface for the lid seal, is produced during the blow-molding process by squeezing the

thermoplastically deformable plastic of the barrel wall with the aid of a mold slide, and outside on the solid barrel edge, a peripherally smaller flange edge with a radial extension of about 3 to 5 mm is formed, thus increasing the width of the horizontal support surface for the lower leg of the tension ring.

5

Since the lidded barrel according to the invention in its light design for a capacity of 35 US gallons has a barrel (body) weight of only about 5.2 kg and for a capacity of 55 US gallons has a barrel (body) weight of only about 8.2 kg, as well as an opening width of the upper barrel mouth that is about 15% larger than a usual bulgy lidded barrel of the above-mentioned type, it is very well suited for granulate-like or pasty contents, for which mainly fiber drums are now used.

In the USA, fiber drums, optionally with liners, are also widely used for liquids. Because of its excellent gas and liquid sealing properties as well as the ability to drain residue almost completely (with the lid on) via the residue-drain lid bung, the lightweight lidded barrel according to the invention is also highly suitable for using liquids instead of the previously usual fiber drums.

Other advantages of the lidded barrel according to the invention consist in the fact that it has dimensions that are identical to the greatest extent possible to those of a corresponding plastic L-ring bung barrel or steel bung barrel, and it can thus be handled with the same barrel-gripping tools (parrot's beak). These lidded barrels can also be handled on

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995

pallets together with bung barrels without the losses of space due to big-bellied lidded barrels and differing heights that otherwise usually occur. The filling of the lidded barrels is done via the 2-inch bung using the same filling systems as for bung barrels since the dimensions and arrangements of the lid bung correspond exactly to the relevant dimensions of the bung barrel.

Reconditioning of the lidded barrels for reuse or multiple use is considerably simpler and more efficient in comparison with bung barrels, and also later disposal causes no problems whatsoever since the plastic of the barrel body and barrel lid as well as the tension ring, whether it is made of steel or of plastic, can be recycled without residue.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention as well as other advantageous embodiment variants are explained in greater detail and described below based on the embodiments diagrammatically presented in the drawings. Here:

- Fig. 1 shows a lidded barrel with a base ring according to the invention, in side view,
- Fig. 2 shows another embodiment of the lidded barrel according to the invention,
- Fig. 3 shows a configuration comparison between a usual bulgy lidded barrel and a cylindrical lidded barrel according to the invention,

- Fig. 4 shows a sectional view through the left edge area of a lidded barrel according to the invention (US version),
- Fig. 5 shows a sectional view through the left upper edge area of a lidded barrel according to the invention,
- Fig. 6 shows a sectional view through the right upper edge area of a lidded barrel with barrel-gripping claws that are put on according to the invention,
- Fig. 7 shows an enlarged sectional view through the right upper edge area of a lidded barrel according to the invention,
- Fig. 8 shows another lidded barrel (without base ring) according to the invention in side view with a partial sectional view (European version),
- Fig. 9 shows an enlarged view of the upper barrel area of the lidded barrel according to Fig. 8,
- Fig. 10 shows an upper left barrel area in a partial sectional view,
- Fig. 11 shows the upper left barrel area according to Fig. 10 in a complete sectional view,
- Fig. 12 shows an upper right barrel area in a sectional view,
- Fig. 13 shows an upper left barrel area in a sectional view of another embodiment (US version) and
- Fig. 14 shows an upper left barrel area in a sectional view of another embodiment (US version).

DETAILED DESCRIPTION OF THE INVENTION

5 In Fig. 1, a lidded barrel with a capacity of 55 US gallons here, according to the invention, which is provided with a barrel lid 12 put on and a tension-ring closure 14 in place, is referred to by reference number 10. About 80% of barrel body 20 is designed as fully cylindrical, while about 10% respectively of the barrel height upward toward barrel opening edge 28 and downward toward barrel bottom 34 is drawn in with a slight conical taper. In fully cylindrical part 26 of barrel body 20, two comparatively broad rounded barrel body roller cages 38 are arranged at one-third and two-thirds of the barrel height. In the conically tapered transition area between fully cylindrical part 26 of barrel body 20 and flat barrel bottom 34, a solid bottom roller cage 36 that ends flush with barrel bottom 34 is provided. Bottom roller cage 36 has a trapezoidal cross section below with a thinner bridge connection to barrel body 20 and an outside diameter that is almost identical to that of tension ring 14, which is put on in the closed state and imparts to lidded barrel 10 excellent stability, especially when several barrels are stacked on top of one another, and a high degree of stiffness or resistance to indentation or crushing (buckling work in plastic) of the lower barrel edge when a filled lidded barrel is rolled at an oblique angle.

20 The barrel with a capacity of 55 US gallons has a maximum diameter of about 578 mm and a height of about 898 mm (height/diameter ratio about 1.55). A first modified barrel design with identical diameter dimensions, but a somewhat smaller volume of 52.5 US gallons, has a height/diameter ratio of about 1.49, and the barrel height with a tension ring mounted is about 860 mm. This barrel thus is of precisely the same height as the usual lidded

0952002-031400
15

barrels that are found in the USA, and it can therefore be handled on a pallet with the latter. A second modified barrel design with identical diameter dimensions, but a comparatively smaller volume of only 36 US gallons, has a height/diameter ratio of only 1.06, and the barrel height with a tension ring mounted is about 610 mm. This barrel (the so-called "stubby drum") appears as high as it is wide and is provided especially for granulate-like or powder-like products, such as pigments, and to remove them from the barrel, the pigments are "scooped out" by hand with a scoop. Owing to the small height (about one arm's length) of the barrel, it is also possible to remove residue from the lower barrel area without having to bend double to reach into the barrel or to inhale dust particles.

In Fig. 2, a slender lidded barrel 10 with a volume of 35 US gallons is depicted as a preferred embodiment. This lidded barrel has a height of about 860 mm and a maximum diameter of barrel body roller cages 38 of about 475 mm. The height/diameter ratio of this barrel is about 1.82. A modified barrel design with the identical diameter dimensions, but a smaller volume of 30 US gallons has, on the other hand, a height-diameter ratio of about 1.57, and the barrel height with a tension ring mounted is about 745 mm. The two barrel types of identical diameter (according to Fig. 1 and 2) with only different heights can be produced in an advantageous way in a single alternating blow mold. To this end, only a suitable extension ring piece in the blow mold needs to be used (taller barrel) or removed (shorter barrel).

The particular feature of this embodiment variant thus consists in the fact that it has almost the same dimensions as the fiber drums that are usually used today in the USA

and can be manipulated and handled with the same barrel-gripping tools as the usual fiber drums or bung barrels. In addition, the novel lidded barrels in a light design can be produced more economically than comparable fiber drums and subsequently cause no disposal problems whatsoever since they are completely recyclable. The tension ring can be a usual sheet-steel closure ring, but it can also be made entirely of plastic.

When using the lidded barrel according to the invention to hold liquids, barrel lid 12 is equipped with at least one bung opening, preferably with two lateral bung openings that can be sealed and are arranged on opposite sides from one another; larger bung 42 has a 2-inch (about 50.8 mm) opening, and smaller bung 44 has a 3/4-inch (about 19.1 mm) opening. From Fig. 2, it is also clear that the conical outline of the barrel wall inside indentation 22 below horizontal attachment surface 18 for the lower leg of tension-ring closure 14 is made at an acute angle α of between 15° and 30° , preferably about 18° to 20° , at transition 24 to fully cylindrical part 26 of barrel body 20. This configuration ensures a high degree of resistance to stacking stresses.

In Fig. 3, a previously commonly used bulgy standard lidded barrel or its barrel body 46 is drawn in the left half of the drawing in dotted configuration for comparison with barrel body 20 according to the invention. From this, the improved stability of the more slender lidded barrel according to the invention is clear. Furthermore, it is evident that in the case of the bulgy barrel body, the fully cylindrical part is only about one-third (1/3) of the entire height of the barrel body, while fully cylindrical part 26 in the case of the barrel body

according to the invention constitutes more than three-fourths (3/4) of the entire height of the barrel body. As an advantageous result, especially also due to sturdy bottom roller cage 36, the barrels can be more easily handled on pallets, while simultaneously having improved stability and better rolling-off capability when the barrel is tilted.

5

In Fig. 4, the left edge area of a lidded barrel 12 according to the invention is shown in cross-sectional view. A lid seal 30 is inserted or foamed-in into downward-facing U-shaped lid edge 16. An approximately 25 mm deep engaging groove 32 is made between lid edge 16 and central flat lid disk 80 that is arranged almost flush at the same height. Engaging groove 32 has a flat groove floor 48, which evenly extends radially inward at least 10 mm, and preferably about 15 mm. An obliquely conical ring part 52 rises from groove floor 48 as a connecting piece to upper flat lid disk 80.

On the lower side of barrel lid 12, two approximately 20 mm long (axial) ring flanges 54, 56 that extend down below engaging groove 32 are made in the outside edge area. Ring flanges 54, 56 are about 20 mm apart and are used to increase the stiffness of barrel lid 12. Also visible is 2-inch bung 42 that is arranged in a sunken bung housing 50. Of special importance is an intermediate piece or connecting piece 58 which is formed between U-shaped lid edge 16 and groove floor 48 and which, starting from lid edge 16, is bent or angled inward. With barrel lid 12 put in place, this bent connecting piece 58 or outer axial ring piece 54 comes to rest with the inside wall of barrel body 20 opposite outer indentation 22 and increases the stacking capacity of the lid or lidded barrel because of the mutual support.

03526002, 034400
15

In Fig. 5, a corresponding partial section through the left upper edge area of a barrel lid 12 according to the invention is shown, but laterally outside a bung or bung housing. Here, radial ribs 60 that rest on the inside against U-shaped lid edge 16 are arranged above angled connecting piece 58. Radial ribs 60 are provided in large numbers with a small lateral spacing of about 5 mm to 10 mm.

Furthermore, in this embodiment of barrel lid 12, a second upward-facing peripheral V-shaped groove 62 with a preferably rounded groove floor in the outside area of flat lid disk 80 is provided facing radially inward behind engaging groove 32. This groove 62 is interrupted only by the recessed bung housing and improves the elasticity of the lid against internal overpressure and the surge pressure that occurs when a barrel falls.

Further, Fig. 6 shows the upper right edge area of a lidded barrel according to the invention with barrel-gripping claws 64, 66 applied. For the light barrel design, it is necessary that, in particular, the barrel lid and the barrel opening area be matched exactly to one another. Part of this is that, i.e., to ensure secure attachment of lower barrel-gripping claw 66, the radial depth of indentation 22, measured from the extension line of the fully cylindrical part of the barrel body, is between 12 mm and 25 mm, preferably about 17 mm. The width of the horizontal support surface for the lower leg of tension ring 14 or the attachment surface for barrel-gripping claw 66 is also increased by virtue of the fact that solid barrel opening edge 28 is produced during the blow-molding process by squeezing the thermoplastically deformable plastic of the barrel wall with the aid of a mold slide, so that a

small peripheral flange edge 40 extending radially outward about 3 to 5 mm is formed on the outside at the bottom at barrel edge 28.

In Fig. 6, it is further evident that the area of solid barrel opening edge 28 that points upward with a height of about 8 mm upward has a smooth, partially circular cross section as a sealing surface for lid seal 30. A special design of the mold slide in the blow mold ensures that this sealing surface of squeezed solid barrel opening edge 28 that points upward and is exactly opposite lid seal 30 remains free of folds and seams of the squeezed plastic. These folds and seams are shifted outward and are advantageously arranged in outer flange edge 40, where they no longer pose a problem. To improve the engagement area of upper barrel-gripping claw 64, a considerable number of radial ribs 60 can be provided above bent connecting piece 58 behind U-shaped lid edge 16.

To illustrate important features according to the invention, Fig. 7 shows once more in detailed representation the upper right barrel area of a lidded barrel. Quite important structural features consist especially in the fact that:

Above on the lid edge, an approximately 6 mm to 12 mm, preferably 8 mm wide, slightly obliquely adapted support surface 84 (identified by arrow) is formed for the upper leg of tension ring closure 14. Thus, when, for example, a barrel is dropped, the lid edge cannot move outward in the buckling areas under the tension ring, and the stress on the lid seal will not be relieved.

Because of flange edge 40 which projects or overhangs outward at the lower outside edge of the barrel body opening, an enlarged support surface 18 of at least 10 mm is provided for the lower slightly oblique leg of tension ring 14. The support surface is (in the radial direction) preferably even 15 mm (arrow 86) wide. This is also advantageous for reliably gripping the barrel with the lower claw of the barrel-gripping tool (parrot's beak). Groove floor 48 of outer peripheral engaging groove 32 is arranged at the same height as or even a little below the lower leg of tension ring 14. As a result, the upper claws of the barrel-gripping device engage far down into engaging groove 32 and reliably secure the lidded barrel.

The barrel body edge, which is overlapped by tension ring 14, is basically designed as a T that projects upward with a horizontal arm 88 and a vertical arm 90 that is arranged approximately in the center and pointing upward, and the surface of vertical arm 90 that is pointing upward is rounded in the shape of a partial circle (radius 4.5 mm) and represents the sealing surface of the barrel body edge that comes into contact with lid seal 30. A partial piece of horizontal arm 88 that points outward is represented by flange edge 40, which projects radially outward. The partial piece of the horizontal arm that points inward connects to the barrel body wall that runs downward. The cut point or cut surface of the cut-off slug piece (waste piece from the blow-molding process) is located in the transition area from the partial piece that points inward to the barrel wall that runs downward. The cut edge can run perpendicular or, as represented, slightly obliquely downward and toward the inside. Directly below the cut edge, there is a contact area 92 of the barrel inner wall with the outside surface of the barrel lid or the extension of outer lid ring arm 54. In contact area 92 is the

09525002 031400 15

narrowest diameter of the barrel body opening, which is about 2 to 4 mm smaller here than at the cut edge of the slug piece. When the cover is mounted, outer lid ring arm 54 passes into the barrel interior and radial centering and bracing of the lid on the inner wall of the barrel takes place in contact area 92 below the cut surface of the slug piece. If a number of barrel bodies are distorted in a slightly oval shape, e.g., by shrinkage stresses, a centering adaptation is made in the barrel opening area, thus ensuring a uniform positioning and an exact fit of the sealing surface of upward-pointing vertical arm 90 to lid seal 30. Such centering cannot be achieved with conventional barrel lids, which do not project part-way into the barrel interior and make contact there with the barrel inner wall. It is just this kind of centering that makes it possible to adapt the width of vertical arm 90 (8 mm wide, about 9 mm high) to the inner width (about 10 mm) of the downward-facing U-shaped lid edge precisely enough to ensure that, on the outside and inside of vertical arm 90, exact lateral spacing gaps 96, 98 (identified by arrows) 1 mm wide are left. This ensures that vertical arm 90 with the smooth, arched sealing surface always hits in the center on sealing ring 30.

20

The lidded barrel according to the invention is further distinguished in that the maximum outside diameter of barrel lid 12 is equal in size to the outside diameter of flange edge 40 that projects radially outward (both connect flush to one another), and the distance between the face of the outer downward-facing leg and the downward-opening U-shaped lid edge for the upward-facing lateral face of flange edge 40 that projects radially outward at the barrel opening edge with a lid put on and with the tension ring closure closed is only about 1 mm. For this purpose, it is ensured that when the stack load is applied, lid seal 30 needs to

give only by this 1 mm, and then the outer leg of the lid edge will come into contact with flange edge 40 that projects outside and will be supported on it in such a way that overstressing of seal 30 will be avoided.

Another lidded barrel according to the invention (European version) without a base ring and with a capacity of 220 liters is depicted in Fig. 8, which with barrel lid 12 put on and tension ring closure 14 in place has a barrel weight of only about 8 kg. The plastic of the barrel body consists of high-molecular-weight polyethylene (HD-PE). In this embodiment the disk-shaped upper plate of barrel lid 12 projects over U-shaped lid edge 16 which is open downward or the upper leg of tension ring 14 that engages over the latter. The excess height is about two to five times the wall thickness or thickness of the barrel lid, preferably about 10 mm. This is used to improve long-term stacking properties owing to a defined inner pressure buildup. In a modified embodiment, the lidded barrel can be equipped at the bottom with a base ring or bottom roller cage, which then is aligned in a plane with the bottom or is flush with it.

Fig. 9 provides a better view of barrel lid 12 with two lateral bungs 42, 44 that are recessed in bung cavities 50, 50'. (Left) 2-inch bung 42 is provided for filling as well as for the removal of the contents by means of a suction pipe. Further, said bung 42 is designed as a residue-drain bung owing to the adjacent incline of the lid upper plate. Smaller 3/4 inch bung 44 can be opened to vent the barrel during filling or removal processes.

As an additional, quite essential feature, it can be seen here that below V-shaped engaging groove 32 on the inside of barrel lid 12, two peripheral ring lands 54, 56, which are spaced a certain distance apart, are made. Outer ring land 54 rests on the inner barrel wall. Ring lands 54, 56 are spaced approximately 10 mm to 30 mm, preferably about 20 mm, apart and extend over a length of about 20 mm into the barrel in the axial direction. The particular feature of this embodiment variant of a lidded barrel now consists in the fact that it has almost exactly the same dimensions as a suitably closed L-ring bung barrel, which is usual and in use at present in the chemical industry in Europe, so that the novel lidded barrel can be handled on pallets together with ordinary bung barrels and can be manipulated and handled with the same barrel-gripping tools as ordinary bung barrels. The novel lidded barrels in a light design can further be produced economically and later cause no disposal problems whatsoever since they are completely recyclable. Also, here, tension ring 14 can be an ordinary sheet-steel closure ring, but it can also be made entirely of plastic.

In Fig. 10, barrel lid 12 is shown in a sectional view next to 2-inch bung 42. On both sides of bung housing 50, the upper plate of barrel lid 12 is designed tilted downward toward the lid edge. On the outside, incline 68 extends as far as the projection or the beginning of inner ring land 56 or as far as the inner flat edge of engaging groove 32.

Thus, when the lidded barrel is tilted slightly when inverted (turned over), the very last drop of liquid will flow out to lowest point 78 at the upper edge of inner ring land 56

or at the outer edge of the 2-inch bung or will run out through the bunghole from the inside of the barrel.

In order also to make it possible for residual liquid to flow out from the outer lid area or from the space between two ring lands 54 and 56, it is provided according to the invention that a bore 76 (or a wider crosswise opening) be introduced at least in inner ring land 56 directly in front of discharge bung 42. It is also advantageous to provide a suitable bore in outer ring land 54 at the same spot to make it possible for residual liquid from the space between the inside barrel wall and outside ring land 54. It is advisable to provide an inside-type indentation 74, viewed from the inside, directly in front of bung 42, into which bore 76, which is in ring land 56 and which leads to the bunghole, empties. In engaging groove 32, this inner outlet trough appears as a projection 72 that extends upward like a ridge obliquely to the bung.

As Fig. 11 shows, bores 76 run through ring lands 54 and 56 obliquely to the bung and with a steeper inclination to the bung than incline 68, so that lowest point 78 is produced on the outer edge of the bunghole. This can be achieved so easily because flat groove floor 48 of engaging groove 32 is deeper than the bottom of bung housing 50. Groove floor 48 is approximately one to two wall thicknesses (about 30 mm to 10 mm) of the barrel lid deeper than the bottom of the bung housing.

In Fig. 12, the right edge area of a lidded barrel according to the invention is further shown in cross-section. As the other drawing figures also show, lid seal 30 is introduced into U-shaped lid edge 16 that is open downward. Engaging groove 32, which is about 20 mm to 40 mm deep, is placed between lid edge 16 and the central flat lid disk, which is designed to be higher. Engaging groove 32 has flat groove floor 48, which extends horizontally about 15 mm radially inward. From groove floor 48, obliquely conical ring part 52 rises (except in the bung housing area) as a connecting piece to the upper flat lid disk.

On the lower side of barrel lid 12, two ring flanges 54, 56, which are recessed about 20 mm (axially) in the barrel body, are made in the outside area. Also visible is the 3/4-inch bung 44 arranged in recessed bung housing 50'. Basically, the residue-drain lid incline could also be placed here.

In Fig. 13, another embodiment of a lidded barrel according to the invention (US version) is presented. In this connection, discharge bung 42' in the embodiment usually found in the USA is designed with bung plug 70 which seals at the top at the bung connection piece -- in contrast to the embodiment of the bung plug usually found in Europe, which comes to rest with its sealing ring and is sealed in the bung connection piece below the screw threading at a retracted conical sealing surface.

The last embodiment, depicted in Fig. 14, is distinguished from the embodiment shown in Fig. 13 essentially in that the upper plate or central flat lid disk 80 of

the barrel lid is designed flush with the lid edge or flush with the upper leg of the tension ring. In this case, consequently, incline 68 of the flattened lid area runs correspondingly flatter laterally beside the discharge bung.

5 For the light barrel design according to the invention, it is necessary that, in particular, the barrel lid and the barrel opening area be matched exactly to one another. The special design of upper barrel edge 28 is significant. Part of this is that, to ensure secure attachment of lower barrel-gripping claw 66, the radial depth of indentation 22, measured from the extension line of the fully cylindrical part of the barrel body, is between 12 mm and 25 mm, preferably about 17 mm. The width of the slightly oblique attachment surface for the lower leg of tension ring 14 or the attachment surface for barrel-gripping claw 66 is also increased by virtue of the fact that solid barrel opening edge 28 is produced during the blow-molding process by squeezing the thermoplastically deformable plastic of the barrel wall with the aid of a mold slide in such a way that a small peripheral flange edge 40 that extends
10
15 radially outward about 5 mm is formed on the outside down at barrel edge 28.

Barrel mouth edge 28 is designed as an inverted "L," which forms an angle of about 70° to 85°, preferably about 76°, between its long leg (= barrel wall) that points downward and its basically horizontal short leg that points outward. The short leg that points
20 outward is designed to be slightly obliquely conical on its lower side, i.e., it tapers outward. The oblique surface is used as attachment surface for the lower leg of the tension ring which, with the lid seal in the closed state, presses the lid on the upper barrel wall by means of the

oblique attachment surface. The short "L"-leg is provided on its upper side with a bead-like projection, which has a smooth semicircular sealing surface above. This beadlike projection engages in the U-shaped lid edge and seals against the lid seal. The outer edge of the U-shaped lid edge that points downward ends almost flush with flange edge 40 of barrel opening edge 28 that points radially outward, so that the lid seal will not be overstressed even in the case of overstacking.

The semicircular area of solid barrel opening edge 28 that points upward has a height of at least 10 mm and forms the sealing surface for lid seal 30. A special design of the mold slide in the blow mold ensures that the sealing surface of squeezed solid barrel mouth edge 28 that points upward remains free of folds and seams of the squeezed plastic.

To achieve the advantageous properties of the lidded barrel according to the invention, considerable numbers of details and subtleties that are matched to one another are important, which in combination with one another constitute the essence of this lidded barrel.

CLAIMS

1. A plastic lidded barrel (10) having a barrel body (20) with an upper open end defined by an upper barrel edge (28) and a radially inwardly facing wall surface, a plastic barrel lid (12) covering the open end of the barrel in a closed position of the lid, said lid having a central section and an outer lid edge (16) which in cross-section defines a downwardly facing U-shaped part overlying said upper barrel edge (28) with an outer downwardly facing peripheral edge disposed radially outwardly of said barrel edge (28), a U-shaped tension-ring closure member (14), which in said closed position of the lid engages with an upper leg of said tension-ring closure member over an upwardly facing surface of said outer lid edge (16) and engages with a lower leg of said tension-ring closure member under an outer downwardly facing barrel edge (18) that extends below the upper barrel edge (28), characterized in that:
- a) said barrel lid (12), between said outer lid edge (16) and said central section, includes an engaging groove (32) for an upper claw of a parrot beak lifting mechanism, said engaging groove (32) having a groove floor (48), a first side wall (52) connecting said floor (48) to said central section and a second side wall (58) connecting said floor (48) and said outer lid edge (16);
 - b) an outer ring flange (54) extending downwardly from said floor (48) of said engaging groove (32); and

- c) a radially outwardly facing surface disposed along said second side wall (58) and said outer ring flange (54) and having a portion thereof facing said inner wall surface of said open upper end of said barrel body (20).

2. A blow-molded lidded barrel (10) having a barrel body (20) with an upper open end defined by an upper barrel edge (28) having an uppermost surface and an outer downwardly facing peripheral barrel edge surface (18) disposed radially outwardly of said barrel body (20), and a radially inwardly facing inner wall surface, a barrel lid (12) covering the open end of the barrel in a closed position of the lid, said lid having a central section and an outer peripheral lid edge (16) which in cross-section defines a downwardly facing U-shaped part overlying said upper barrel edge (28), a U-shaped tension-ring closure member (14), which in said closed position of the lid engages with an upper leg of said tension-ring closure member over an upwardly facing surface of said outer lid edge (16) and engages with a lower leg of said tension-ring closure member under said outer downwardly facing barrel edge surface (18) that extends below said uppermost surface of the upper barrel edge (28), characterized in that:

- a) the lower leg of the tension-ring closure member (14) engages in an indentation (22) in the upper barrel body;
- b) said indentation (22) has an upper boundary defined by said barrel edge surface (18) and a portion extending downwardly away from said barrel edge

surface (18) to provide space sufficient to receive a lower claw of a parrot beak lifting mechanism;

- c) the uppermost surface of said upper barrel edge (28) defines an outer support with a lid seal (30) disposed between said upper barrel edge (28) and said U-shaped surface of said outer lid edge (16);
- d) said barrel lid (12), between said outer lid edge (16) and said central section, includes an engaging area (32) for an upper claw of said parrot beak lifting mechanism; and
- e) the upper open end of the barrel body (20) further includes an exterior flange (40) extending radially outwardly of said upper barrel edge (28) with a lower surface thereof defining a part of said outer barrel edge surface (18).

3. In an open top barrel (10) having a barrel body (20) with an upper end defined by an upper barrel edge (28) extending circumferentially around said barrel and including a first portion (27) extending radially away from said body (20) and having a downwardly facing surface (18), and a second portion (29) extending upwardly from said first portion (27) at a location radially outwardly of said first portion (27), the improvement comprising:

- a) an exterior rib (40), said rib (40) defining part of said barrel edge and having both an upper surface and a lower surface projecting radially outwardly of said first and second portions with said lower surface of said rib disposed along said downwardly facing surface (18) and defining a continuing part of said

downwardly facing surface (18), said rib (40) terminating in a free end surface connecting said upper and lower surfaces.

4. In a blow-molded lidded barrel (10) having a barrel body (20) with an upper open end defined by an upper barrel edge (28) having a first portion (27) extending radially away from said body (20) and having a downwardly facing surface (18), and a second portion (29) extending upwardly from said first portion (27) at a location radially outwardly of said first portion (27), to define an uppermost surface, a barrel lid (12) covering the open end of the barrel in a closed position of the lid, said lid having a central section and an outer peripheral lid edge (16) which in cross-section defines a downwardly facing U-shaped part overlying said upper barrel edge (28), a U-shaped tension-ring closure member (14), which in said closed position of the lid engages with an upper leg of said-tension ring closure member over an upwardly facing surface of said outer lid edge (16) and engages with a lower leg of said tension-ring closure member under said downwardly facing surface (18) that extends below said uppermost surface of the upper barrel edge (28), the improvement comprising:

- a) an exterior rib (40), said rib (40) defining part of said barrel edge and having both an upper surface and a lower surface projecting radially outwardly of said first and second portions with said lower surface of said rib disposed along said downwardly facing surface (18) and defining a continuing part of said downwardly facing surface (18), said rib (40) terminating in a free end surface connecting said upper and lower surfaces.

5. An open top plastic drum, comprising:

- a) a blow-molded drum body having:
 - i) a closed bottom;
 - ii) a substantially axially symmetrical sidewall extending upwardly from said bottom; and
 - iii) a chime portion for receiving a removable cover, said chime portion extending from said sidewall so as to define an open top and including:
 - (1) a substantially radial first chime wall projecting outwardly from said sidewall and having a bottom surface,
 - (2) a substantially cylindrical second chime wall directed upwardly from an outer portion of said first chime wall and having a lower portion contiguous with adjacent said first chime wall, and
 - (3) an exterior circumferential rib having a bottom surface that is substantially coplanar with said first wall;
- b) a cover having a peripheral chime receiving member that includes a circumferential flange having an inner diameter larger than said second chime wall but less than said circumferential rib; and
- c) a retaining ring having first and second legs fixedly connected by an intermediate band, wherein said first leg engages an outer surface of said peripheral chime receiving member directly above said second chime wall, and

wherein said second leg engages the bottom portions of said rib and said first chime wall directly below said second chime wall.

6. An open top drum as defined in claim 5 wherein said rib fills a portion of an area between said second leg, intermediate band, second chime wall and circumferential flange.
7. An open top drum as defined in claim 5 wherein said rib substantially fills said area.
8. An open top drum as defined in claim 5 wherein said drum is made of blow molded plastic and said sidewall is substantially frustoconical.
9. An open top drum as described in claim 5, wherein said cover is plastic and includes a skirt that extends inside said chime portion.
10. An open top plastic drum, comprising:
 - a) a blow-molded drum body having:
 - i) a closed bottom;
 - ii) a substantially axially symmetrical sidewall extending upwardly from said bottom, and
 - iii) a chime portion for receiving a removable cover, said chime portion extending from said sidewall so as to define an open top and including:

engagement of the lower leg of the ring with the chime portion is increased and the ring has increased resistance to deformation and sliding from the chime if the drum is dropped.

- 5 11. An open top drum as defined in claim 10 wherein said rib fills a portion of an area between said second leg, intermediate band, second chime wall and circumferential flange.
- 10 12. An open top drum as defined in claim 10 wherein said rib substantially fills said area.
- 15 13. An open top drum as defined in claim 10 wherein said drum is made of blow molded plastic and said sidewall is substantially frustroconical.
- 15 14. An open top drum as described in claim 10, wherein said cover is plastic and includes a skirt that extends inside said chime portion.

ABSTRACT

This invention relates to a cylindrical, blow-molded lidded barrel (wide-mouthed drum) with a barrel lid and tension-ring closure. Previously known lidded barrels have comparatively little ability to withstand falls and are therefore not well-suited for handling liquids. Owing to the special configuration of the barrel lid and the barrel mouth edges as well as by a special matching of the individual components to one another, the lidded barrel according to the invention can be manipulated in the filled state with the same barrel-gripping tool (parrot's beak), and is universally employed and in industrial use for modern plastic L-ring bung barrels or normal steel bung barrels. By improving the strength of the lidded barrel when it is dropped, the barrel is also made especially well-suited for handling liquids since it remains liquidtight even when dumped or dropped from great heights.

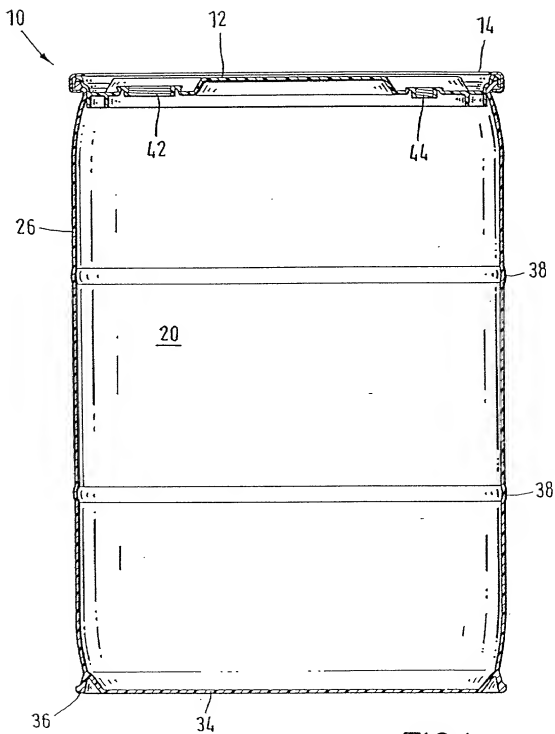


FIG.1

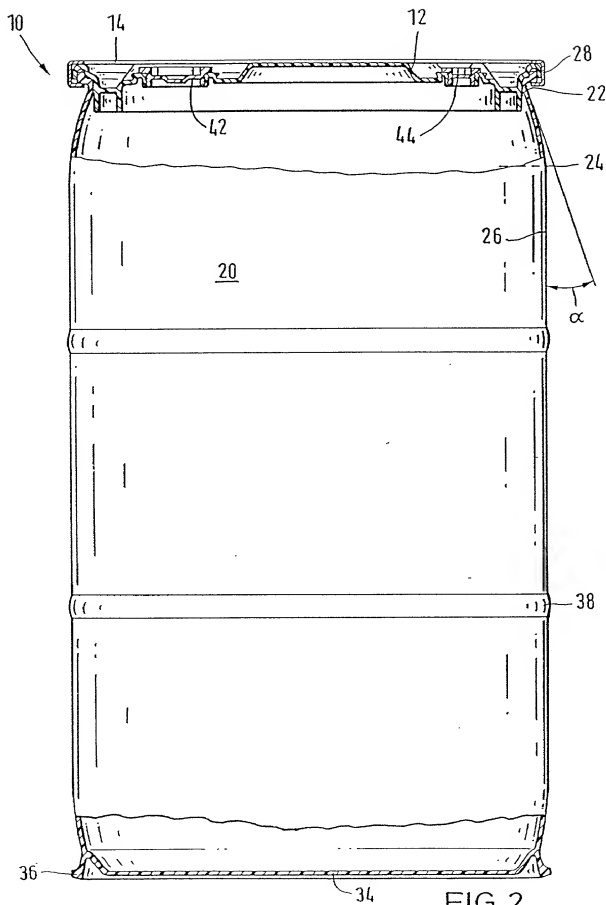


FIG. 2

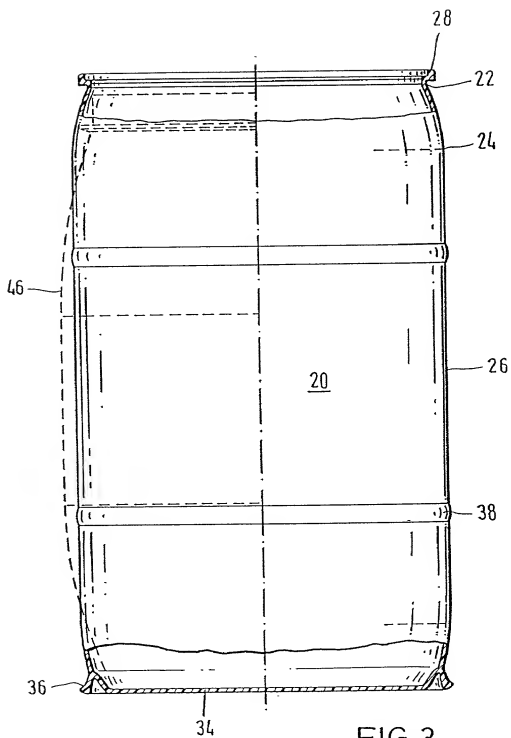
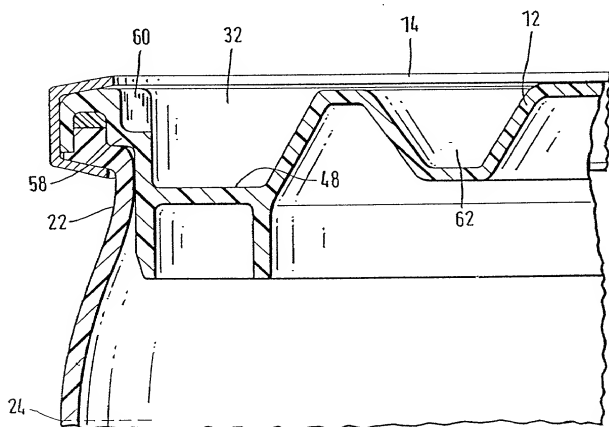
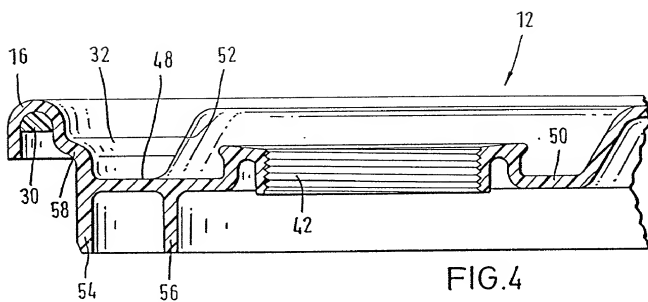


FIG.3



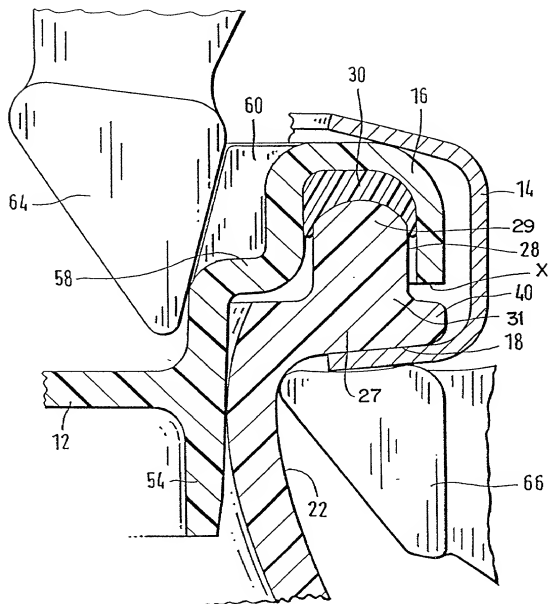


FIG.6

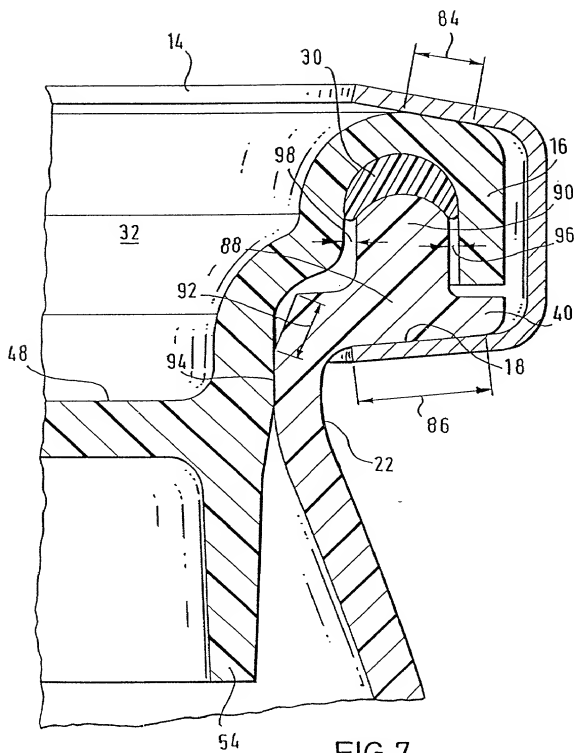


FIG. 7

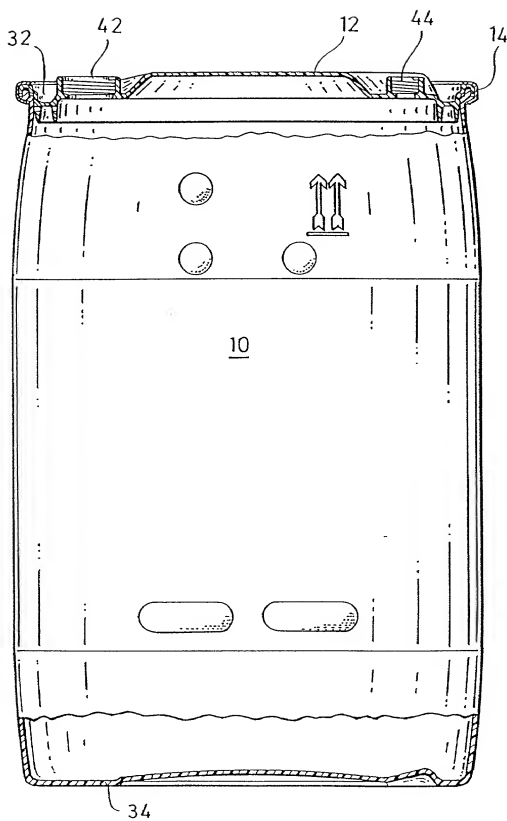


FIG.8

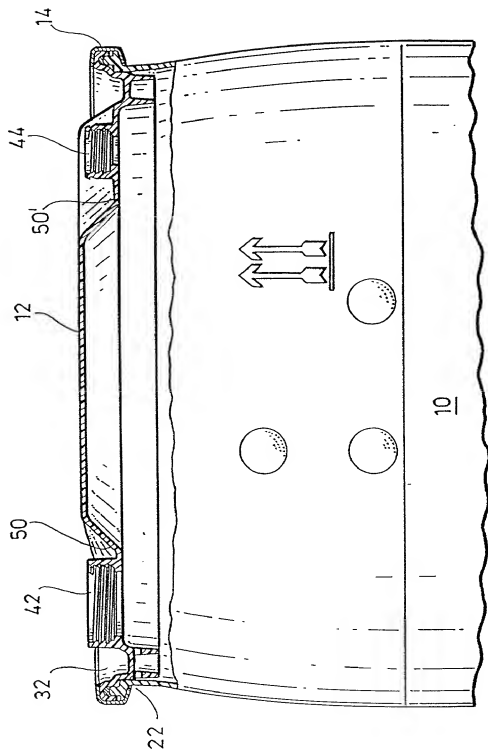


FIG. 9

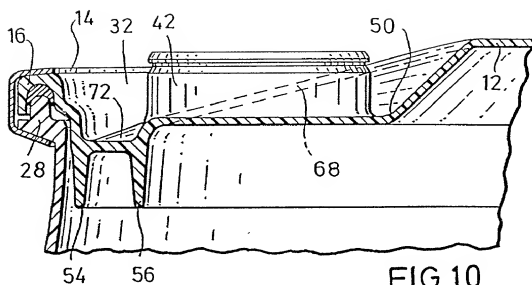


FIG. 10

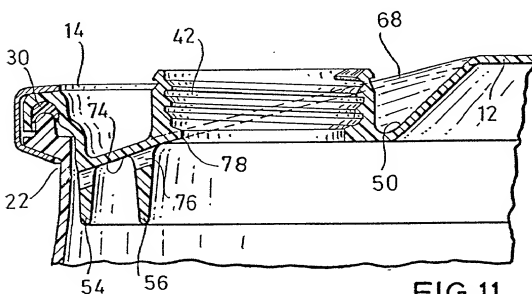


FIG. 11

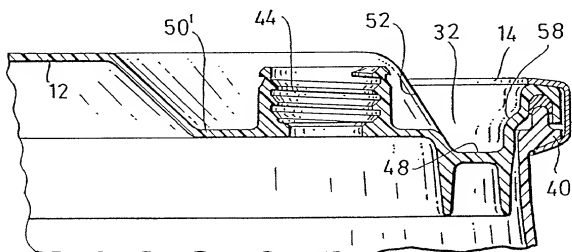


FIG. 12

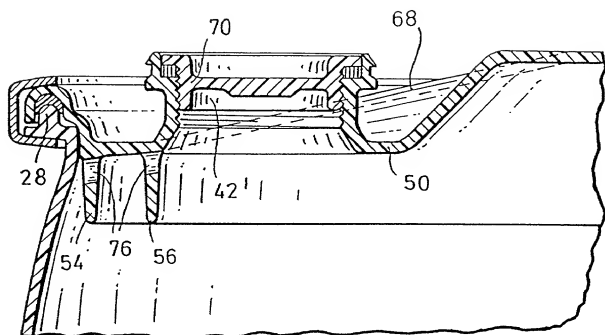


FIG.13

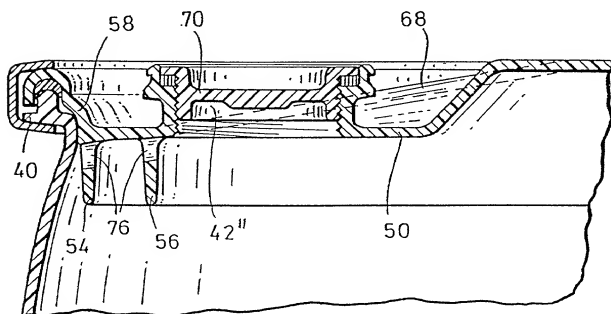


FIG.14

**SUPPLEMENTAL DECLARATION
AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below at 201 et seq. underneath my name.

I believe I am the original, first and sole inventor if only one name is listed at 201 below, or an original, first and joint inventor if plural names are listed at 201 et seq. below, of the subject matter which is claimed and for which a patent is sought on the invention entitled

LIDDED BARREL

and for which a patent application:

☐ is attached hereto and includes amendment(s) filed on *(if applicable)*

☒ was filed in the United States on July 29, 1999 as Application No. 09/363,017 *(for declaration not accompanying application)*

with amendment(s) filed on *(if applicable)*

☒ was filed as PCT international Application No. PCT/EP95/03586 on September 12, 1995 and was amended under PCT Article 19 on *(if applicable)*

I hereby state that I have reviewed and understand the contents of the above identified application, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED PRIOR TO THE FILING DATE OF THE APPLICATION			
APPLICATION NUMBER	COUNTRY	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
G 94 17 442.3	Germany	3 Nov. 1994	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
G 94 14 955.0	Germany	15 Sept. 1994	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
G 42 36 338.1	Germany	28 Oct. 1992	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

APPLICATION NUMBER	FILING DATE

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	FILING DATE	STATUS		
		PATENTED	PENDING	ABANDONED
08/793,751	14 March 1997		X	
08/283,695	1 August 1994	X		
08/049,722	20 April 1993			X

POWER OF ATTORNEY: As a named inventor, I hereby appoint S. Leslie Mirock (Reg. No. 18872), Harry C. Jones, III (Reg. No. 20280), Berj A. Terzian (Reg. No. 20060), Gerald J. Flintoft (Reg. No. 20823), David Weild, III (Reg. No. 21094), Jonathan A. Marshall (Reg. No. 24614), Barry D. Rein (Reg. No. 22411), Stanton T. Lawrence, III (Reg. No. 25736), Charles E. McKenney (Reg. No. 22795), Philip T. Shannon (Reg. No. 24278), Francis E. Morris (Reg. No. 24615), Charles E. Miller (Reg. No. 24576), Gidon D. Stern (Reg. No. 27469), John J. Lantier, Jr. (Reg. No. 27814), Brian M. Poissant (Reg. No. 28462), Brian D. Coggio (Reg. No. 27624), Rory J. Radding (Reg. No. 28749), Stephen J. Harbulak (Reg. No. 29166), Donald J. Goodell (Reg. No. 19766), James N. Palik (Reg. No. 25510), Thomas E. Friebe (Reg. No. 29258), Laura A. Coruzzi (Reg. No. 30742), Jennifer Gordon (Reg. No. 30753), Jon R. Stark (Reg. No. 30111), Allan A. Fanucci (Reg. No. 30256), Geraldine F. Baldwin (Reg. No. 31232), Victor N. Balancia (Reg. No. 31231), Samuel B. Abrams (Reg. No. 30605), Steven I. Wallach (Reg. No. 35402), Marcia H. Sundeen (Reg. No. 30893), Paul J. Zegger (Reg. No. 33821), Edmond R. Barinon (Reg. No. 32110), Bruce J. Barker (Reg. No. 33291), Adriane M. Antler (Reg. No. 32605), Thomas G. Rowan (Reg. No. 34419), James G. Markey (Reg. No. 31636), Thomas D. Kohler (Reg. No. 32797), Scott D. Stumpson (Reg. No. 33607), William S. Galliani (Reg. No. 33885), Gary S. Williams (Reg. No. 31066), Mark A. Farley (Reg. No. 33170) and Ann L. Gisolfi (Reg. No. 31956), all of Pennie & Edmonds LLP, whose addresses are 1155 Avenue of the Americas, New York, New York 10036, 1667 K Street N.W., Washington, DC 20006 and 3300 Hillview Avenue, Palo Alto, CA 94304, and each of them, my attorneys, to prosecute this application, and to transact all business in the Patent and Trademark Office connected therewith.

SEND CORRESPONDENCE TO:		PENNIE & EDMONDS LLP 1667 K Street, N.W. Washington, D.C. 20006		DIRECT TELEPHONE CALLS TO: PENNIE & EDMONDS LLP DOCKETING (202) 496-4721	
201	FULL NAME OF INVENTOR	LAST NAME: PRZYTULLA	FIRST NAME: DIETMAR	MIDDLE NAME:	
	RESIDENCE & CITIZENSHIP	CITY: Kerpen	STATE OR FOREIGN COUNTRY: Germany	COUNTRY OR CITIZENSHIP: Germany	
	POST OFFICE ADDRESS	STREET: Gustav-Heinemann-Str. 64	CITY: Kerpen	STATE OR COUNTRY: Germany	ZIP CODE: 50170
202	FULL NAME OF INVENTOR	LAST NAME:	FIRST NAME:	MIDDLE NAME:	
	RESIDENCE & CITIZENSHIP	CITY:	STATE OR FOREIGN COUNTRY:	COUNTRY OR CITIZENSHIP:	
	POST OFFICE ADDRESS	STREET:	CITY:	STATE OR COUNTRY:	ZIP CODE:
203	FULL NAME OF INVENTOR	LAST NAME:	FIRST NAME:	MIDDLE NAME:	
	RESIDENCE & CITIZENSHIP	CITY:	STATE OR FOREIGN COUNTRY:	COUNTRY OR CITIZENSHIP:	
	POST OFFICE ADDRESS	STREET:	CITY:	STATE OR COUNTRY:	ZIP CODE:
204	FULL NAME OF INVENTOR	LAST NAME:	FIRST NAME:	MIDDLE NAME:	
	RESIDENCE & CITIZENSHIP	CITY:	STATE OR FOREIGN COUNTRY:	COUNTRY OR CITIZENSHIP:	
	POST OFFICE ADDRESS	STREET:	CITY:	STATE OR COUNTRY:	ZIP CODE:
205	FULL NAME OF INVENTOR	LAST NAME:	FIRST NAME:	MIDDLE NAME:	
	RESIDENCE & CITIZENSHIP	CITY:	STATE OR FOREIGN COUNTRY:	COUNTRY OR CITIZENSHIP:	
	POST OFFICE ADDRESS	STREET:	CITY:	STATE OR COUNTRY:	ZIP CODE:
206	FULL NAME OF INVENTOR	LAST NAME:	FIRST NAME:	MIDDLE NAME:	
	RESIDENCE & CITIZENSHIP	CITY:	STATE OR FOREIGN COUNTRY:	COUNTRY OR CITIZENSHIP:	
	POST OFFICE ADDRESS	STREET:	CITY:	STATE OR COUNTRY:	ZIP CODE:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 1 <i>D. Przytulla</i>	SIGNATURE OF INVENTOR 2	SIGNATURE OF INVENTOR 3
DATE: 29.11.99	DATE:	DATE:
SIGNATURE OF INVENTOR 4	SIGNATURE OF INVENTOR 5	SIGNATURE OF INVENTOR 6
DATE:	DATE:	DATE: